


	0	10	20	30	40	50	60	70	80	90	
0	*1 1 0 LDA 10	0 4 2			*1 9 9	1 6 0	1 0 0				0
1	2 1 1 LDB 11	0 1 0			3 1 0	2 6 1	0 0 1				1
2	4 0 1 SUB				0 5 9	4 0 1	0 0 0				2
3	6 0 7 JPP 07	*1 9 9			2 9 9	0 6 0					3
4	3 1 0 MOV 10	3 1 0			3 2 0	6 4 6					4
5	0 9 9 STO 99	0 1 0			0 6 0	1 6 2					5
6	5 9 9	1 9 9			1 6 2	3 1 0					6
7	3 2 0	3 1 0			2 5 9	0 9 9					7
8	0 9 9	0 1 1			4 0 0	5 9 9					8
9	5 9 9	5 0 0			0 6 2	1 0 0				INPUT OUTPUT	9

**M99**  
ordinateur  
en papier

v191028

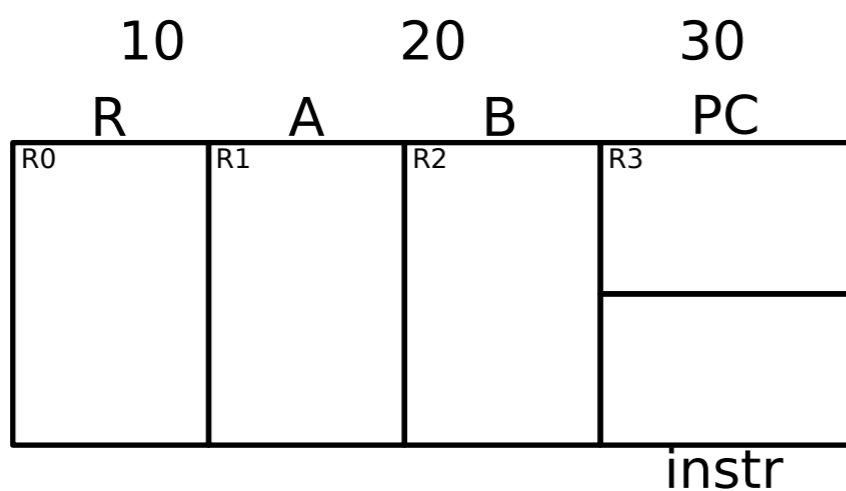

Code Mnémo Signification

0 x y	STO xy	R → mem(xy)
1 x y	LDA xy	A ← mem(xy)
2 x y	LDB xy	B ← mem(xy)
3 x y	MOV x y	Copie le registre Rx dans Ry
		310 (MOV A R) R := A

4 0 0	ADD	R := A + B
4 0 1	SUB	R := A - B

5 x y	JMP xy	PC := xy
6 x y	JPP xy	R > 0 ⇒ PC := xy
7 x y	JEQ xy	R = xy ⇒ PC += 2
8 x y	JNE xy	R ≠ xy ⇒ PC += 2